# POC-624

### 24" Point-of-Care Terminal with 11th Generation Intel® Processor



#### **Features**

- 11th generation Intel® Core™ i5/i7 processor
- 23.8" full HD display with multi-touch P-CAP control
- Multiple I/O, including USB 3.2 Gen 2 (Type A), USB 3.2 Gen 2 (Type C) with display function, and HDMI
- PCle x4, mini PCle, M.2 expansion slots for integrating add-on modules
- Fanless design with IP54-rated protection for superior hygiene and infection
- Equipped with Advantech's DeviceOn device management software
- Optional Wi-Fi, Bluetooth, RFID, smart card reader, Li-ion battery pack, and auto-focus 5 megapixel camera
- Optional hot-swapping battery module with up to 180Wh capacity for mobile applications
- Equipped with DeviceOn/iService software for remote device management













### Introduction

POC-624 is equipped with an integrated NVME SSD that facilitates real-time data processing and storage. Compliant with IEC 60601-1 medical safety standards for electrical devices, POC-6 terminals are built for reliable operation in a wide range of healthcare environments.


Moreover, POC-624 is equipped with Advantech's DeviceOn/iService software, which is a next-generation unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

## **Specifications**


<del>-</del>		
	Processor*	Intel® Core™ i7-1185G7E (12M cache, up to 4.40 GHz) Intel® Core™ i5-1145G7E (8M cache, up to 4.10 GHz)
System	Memory (default)	8G DDR4 (supports up to 64GB DDR4 SODIMM)
	Operating System (optional)	Windows 10 IoT Ent (64 bits only), Linux (supported upon request)
Characa	Primary Storage (default)	NVME SSD 512GB (M.2 2280)
Storage	Secondary Storage (optional)	2.5" SATA SSD available
Dionlay	Size	23.8 inch
Display	Max. Resolution	1920 x 1080
Touch	Туре	10-point multi touch P-CAP (clear glass); optional AG/AR support upon request
	USB 3.2 Gen 2 (Type A)	4
	USB 3.2 Gen 2 (Type C)	1 (with display function)
	USB 2.0 Type A	2
1/0	HDMI	1
	LAN isolation, 1.5KV	2
	Mic-In/Headphone-Out	1/1
	COM (RS232) 1.5KV	2
	PCIe x4**	1 (card length: 167.65 mm/6.6 in)
Expansion Slots	M.2 2230	1 (for Wi-Fi/Bluetooth module)
	Mini PCle	1 (full size)
	Speaker	2 x 2W
Other Functions	LED Book Light	2
Other Fullchorts	Camera	1 x 5 megapixel (optional)
	TPM 1.2/2.0	2.0 (default via software)
Power Input	DC/AC	DC model: 18V, max. 100W/AC model: 100 ~ 240V, max. 150W (choose either DC or AC model)
IP Rating	Front Panel	IP65
II Hatting	System	IP54
Authentication Solution	RFID Reader	Optional (choose either RFID or smart card reader)
(Choose 1)	Smart Card Reader	Optional (choose either RFID or smart card reader)
Battery Solutions	Backup Battery**	Optional (choose either 1 backup battery or PClex4)
(Choose 1)	Hot-Swapping Battery Module	Optional with 2 x batteries (choose either backup battery or battery module)
0 117 11	5140.0.0.4.	Medical CE, FCC (IEC 60601-1-2, 4th edition)
Certification	EMC & Safety	EN 60601-1 Compliance UL 60601-1
	Dimensions (W x H x D)	583 x 387 x 68 mm/22.95 x 15.2 x 2.68 in
Dhusiaal Charastaristics	VESA Mount	100 x 100: 75 x 75 mm
Physical Characteristics	Weight	
	- 3	7.78 kg/17.15 lb 0 ~ 35 °C/32 ~ 95 °F
Environment	Operating Temperature	
	Storage Temperature	0 ~ 50 °C/32 ~ 122 °F
Warranty	System	3 years
	Battery Pack	1 year or capacity 70% and 300 cycles (whichever happens first)

<sup>\*</sup>Intel® Celeron® processor available upon request.

<sup>\*\*</sup>Either PCIe x4 or backup battery can be chosen.

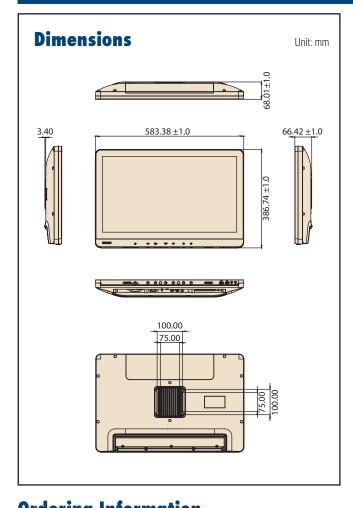


## **Front Function Keys**




- 1. Power button
- 2. Volume down/up
- 3. Touchscreen status control
- 4. Read light control
- 5. Brightness down/up

## I/O Ports (DC Model)



- 1. Headphone-out 2. Mic-in
- 3. 2 x USB 2.0
- 4. 1 x PCle x4 slot 5. Equipotential terminal pin
- 7. 2 x USB 3.2 (Type A)
- 8. 2 x USB 3.2 (Type A) 9. 1 x USB 3.2 (Type C)
- 10. HDMI
- 11. 2 x Gigabit Ethernet 12. 2 x COM (RS-232)
- 13. Smart card reader (optional)

## I/O Ports (AC Model)



- 1. Headphone-out
- 2. Mic-in
- 3. 2 x USB 2.0
- 4. 1 x PCle x4 slot
- 5. Equipotential terminal pin
- 6. 2 x USB 3.2 (Type A) 7. 2 x USB 3.2 (Type A)
- 8. 1 x USB Type-C 9. HDMI
- 10. 2 x Gigabit Ethernet 11. 2 x COM (RS-232)
- 12. AC-in
- 13. Smart card reader (optional)

RFID

Yes

## **Ordering Information**

Part Number (DC Model)	Part Number (AC Model)	Description	CPU*	RAM	Touch	SSD
POC-624-12A11D-CA	POC-624-02A11D-CA	Intel® Core i7, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch	i7	8GB	P-CAP	512GB
POC-624-12A11R-CA	POC-624-02A11R-CA	Intel® Core i7, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, RFID reader, and clear glass with P-CAP touch	i7	8GB	P-CAP	512GB
POC-624-12B11D-CA	POC-624-02B11D-CA	Intel® Core i5, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch	i5	8GB	P-CAP	512GB
POC-624-12B11R-CA	POC-624-02B11R-CA	Intel® Core i5, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, RFID reader, and clear glass with P-CAP touch	i5	8GB	P-CAP	512GB

#### Accessories

#### **Hot-Swapping Battey Module**



#### **Backup Battery (Internal)**





**Charging Station** 



#### Battery module contains 2 x battery packs



**Battery Packs** 



## **Battery Module**

Part Number	Description
POC-BAT-101-6A*	Backup battery (internal)
POC-BAT-201-62*	Hot-swapping battery module for POC-621/624
POC-IPSM90B2	Battery pack (2 x pcs) of POC power system
POC-IPSM90CS3	Charging station (3 x slots) of POC power system

<sup>\*</sup>Choose either a backup battery or hot-swapping battery module.

#### **Power Cord**

Region	Part Number (DC Model)	Part Number (AC Model)
USA (Thailand, Philippines)	1702002600	1700001524
Europe (Indonesia)	1702002605	170203183C
UK (Singapore, Malaysia)	1700018704	170203180A
Japan (PSE)	1700000237	1700008921

## **Battery Pack Specification**

Battery Pack Type	Lithium-ion battery
Battery Pack Capacity	90Wh
Total Capacity	180W (2 x batteries, 90W per battery)
Battery Runtime	6 ~ 8 hours
Battery Lifespan	300 cycle time ≥ 70%
Capacity Indicator	LED indicator with button
Weight	540g/1.2lb

## **Recommended Peripherals**

- Table stands (TBSD-WHA741L)
- Keyboards (KBD-MCWU1020)
- Mouses (MOU-MCWU1001)
- Scanners (SCN-MCWIG829)

For more information: https://www.advantech.com/products/peripherals/sub\_4728dfbab560-43ba-b264-de3aae98b1ff

### **CTOS Service**

#### **Ordering Information (Barebone Units)**

Part Number (DC Model)	Part Number (AC Model)	Description	CPU	RAM	Touch	SSD
POC-624-12A110-CA	POC-624-02A110-CA	Intel® Core i7, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch (without memory and SSD)	i7	NA	P-CAP	NA
POC-624-12B110-CA	POC-624-02B110-CA	Intel® Core i5, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch (without memory and SSD)	i5	NA	P-CAP	NA

#### **Component Offerings Memory**

Part Number	Description	
rait Nullibel	Description	

#### Wi-Fi + BT Module

Part Number	Description	
EWM-W192M202E	Intel® Dual Band Wireless-AC 9260	
FWM-W165M201F	Intel® Dual Band Wireless-AX210 (WiFi 6)	

#### **NVME SSD Storage**

Part Number	Description


#### **Power Cord**

Region	Part Number (DC Model)	Part Number (AC Model)
USA (Thailand, Philippines)	1702002600	1700001524
Europe (Indonesia)	1702002605	170203183C
UK (Singapore, Malaysia)	1700018704	170203180A
Japan (PSE)	1700000237	1700008921

<sup>\*</sup>Backup battery is 1 piece.
\*Hot swap batteries are 2 pieces.

## DeviceOn/iService

### **Unified Remote Device Management Software**

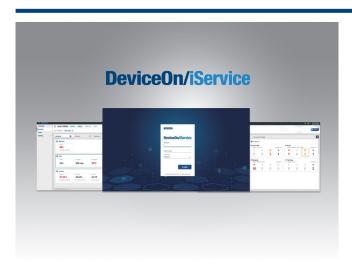

#### **Features**

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

#### Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

#### **Total Management**



#### **Devices & Hardware**

- Windows, Linux, Android
- · Hardware, storage, battery

Remote Access

- **Real-Time Monitoring** Connection/hardware status
- Software/peripheral status
- Failure notifications

# OTA

#### **OTA updates**

**Operational Efficiency** 

- System/software updates
- File repository management
- App store



#### **Software & Peripherals**

- Software monitoring & access
- Screens, USB devices, printers



#### **Remote Controls**

- Power controls
- Audio, backlight controls
- Software controls



#### **Batch Controls**

- 1-to-many batch reboot, etc.
- Time-saving tasks



#### **Open for Expansion**

- Peripheral integration
- Open APIs for integration



#### **Troubleshooting**

- Screenshots
- Remote desktop support



#### **Setup Booster**

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

## **System Architecture**



## **DeviceOn/iService Specifications**

	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	$\checkmark$
	Remote desktop	✓(VNC)
	Device-Specific Controls (Audio, Backlight)	<b>√</b> *
	Connection Status	$\checkmark$
Daviss On // Canviss Damata	Hardware Status	<b>√</b> *
DeviceOn/iService Remote Device Management	Hard Disk Status	<b>√</b> *
Device ivialiagement	Batch Operation Support	$\checkmark$
	OTA Storage Management	FTP
	OTA Software Updates	$\checkmark$
	Software Watchlist	$\checkmark$
	Software Start/Stop	<b>√</b> *
* Dependant on device model	Peripherals Watchlist	<b>√</b> *

Note:

1. DeviceOn/iService software must be downloaded from the Advantech website at https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility